(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 23 September 2004 (23.09.2004)

PCT

(10) International Publication Number WO 2004/081297 A1

(51) International Patent Classification⁷: E02D 27/42, 13/04

(21) International Application Number:

PCT/GB2004/000951

(22) International Filing Date: 8 March 2004 (08.03.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0305898.9

14 March 2003 (14.03.2003) GE


- (71) Applicant (for all designated States except US): CE-MENTATION FOUNDATIONS SKANSKA LIMITED [GB/GB]; Maple Cross House, Denham Way, Maple Cross, Rickmansworth, Hertfordshire WD3 9AS (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SHOTTON, Peter,

Gilbert [GB/GB]; 80 Straight Bit, Flackwell Heath, Bucks HP10 9NA (GB). PAYNE, Ronald, Peter [GB/GB]; Voskelly, Love Lane, Iver, Bucks SL0 9QT (GB).

- (74) Agent: FENLON, Christine, Lesley; Haseltine Lake, Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: PLACING ELEMENTS IN PILES

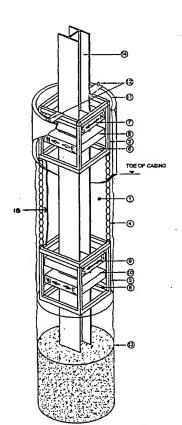

CEMLOC - VL PRINCIPLE OF OPERATION

(57) Abstract: The present application relates to an apparatus and method for placing an element (14), such as a steel column or concrete section, into a pile shaft (1) during top-down construction techniques. The apparatus is provided with an upper and lower positioning means (2, 3) which allow the plan position of the element at upper and lower levels respectively to be adjusted.

WO 2004/081297 A1



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report